AIR/20NL

TGLSL 019

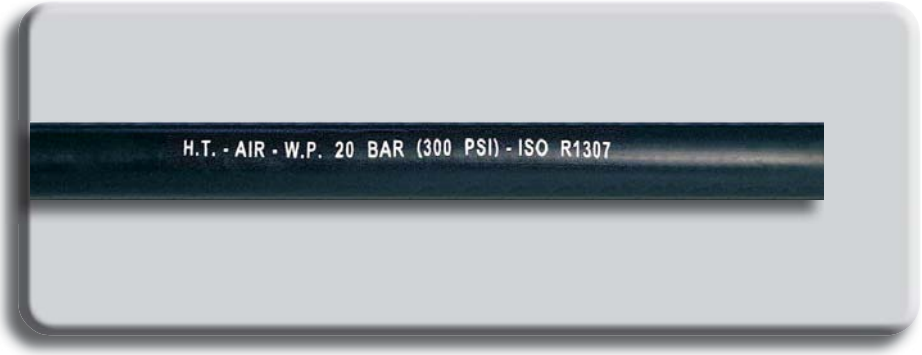

IMPIEGO

Tubo in gomma long length idoneo per mandata di aria compressa e fluidi inerti.

- ***Temperatura:*** -30°C +80°C

APPLICATION

Long length rubber hose suitable for delivery of compressed air and non corrosive fluids.

- ***Temperature range:*** -30°C +80°C

STRUTTURA

- ***Sottostrato:*** liscio in gomma nera SBR.
- ***Rinforzi:*** inserzioni di filati sintetici ad alta resistenza.
- ***Copertura:*** in gomma nera SBR/EPDM resistente all'abrasione e agli agenti atmosferici.
- ***Superficie:*** liscia estrusa.
- ***Marcatura:*** ad inchiostro "H.T. – AIR/WATER – W.P. 20 BAR (300 PSI) – ISO 1307"

CONSTRUCTION

- ***Tube:*** black, smooth SBR rubber.
- ***Reinforcement:*** high strength synthetic textile yarn.
- ***Cover:*** black, abrasion and weathering resistant SBR/EPDM rubber.
- ***Surface:*** smooth extruded.
- ***Branding:*** ink marking "H.T. – AIR/WATER – W.P. 20 BAR (300 PSI) – ISO 1307"

DIAMETRO INTERNO *INSIDE DIAMETER*		DIAMETRO ESTERNO *OUTSIDE DIAMETER*		PESO TEORICO *WEIGHT*		PRESS. ESERCIZIO *WORKING PRESSURE*		PRESS. SCOPPIO *BURST PRESSURE*		RAGGIO CURVATURA *BENDING RADIUS*		LUNGHEZZA *LENGTH*	
mm	inch	mm	inch	kg/mt	lbs/ft	bar	psi	bar	psi	mm	inch	mt	ft
6	1/4"	14	9/16"	0.15	0.10	20	300	60	900	40	1.57"	100	328
8	5/16"	17	21/32"	0.22	0.15	20	300	60	900	55	2.16"	100	328
10	3/8"	19	3/4"	0.25	0.17	20	300	60	900	70	2.76"	100	328
13	1/2"	23	29/32"	0.34	0.23	20	300	60	900	90	3.54"	100	328
16	5/8"	26	1.1/32"	0.40	0.27	20	300	60	900	110	4.33"	80	262
19	3/4"	30	1.3/16"	0.51	0.34	20	300	60	900	135	5.31"	50/60	164/196
25	1"	37	1.15/32"	0.88	0.59	20	300	60	900	175	6.89"	50	164

Altri diametri e/o pressioni realizzabili su richiesta - Le caratteristiche e i dati tecnici possono essere modificati senza preavviso.
Other diameters and/or pressures are feasible upon request - The characteristics and technical data could be changed without warning.

Rev.2