

# 200/316L

Tee ribassati e normali  
Tee  
T-Stück  
Té à souder égal  
Te cuello corto y largo

Norma: EN 10253-3



AISI 316L / W. 1.4404

Fig. 1

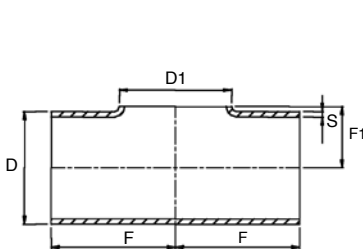


Fig.

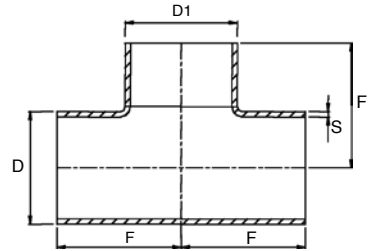


Fig. 1 - SPESSORE / THICKNESS 2 mm

Codice Code	DN	D - D1 mm	S mm	F mm	F1 mm	gr	
200213006	15 (1/2")	21,3	2	25	12	66	10
200269006	20 (3/4")	26,9	2	28	15	90	10
200337006	25 (1")	33,7	2	38	19	146	10
200424006	32 (1" 1/4)	42,4	2	47	23	230	10
200483006	40 (1" 1/2)	48,3	2	57	26	330	10
200603006	50 (2")	60,3	2	63	33	420	5
200761006	65 (2" 1/2)	76,1	2	76	42	850	5
200889006	80 (3")	88,9	2	85	48	1050	5
200114006	100 (4")	114,3	2	105	62	1314	4

Fig. 2 - SPESSORE / THICKNESS 2 mm

Codice Code	DN	D - D1 mm	S mm	F mm	gr	
200213316	15 (1/2")	21,3	2	25	150	10
200269316	20 (3/4")	26,9	2	28	170	10
200337316	25 (1")	33,7	2	38	250	10
200424316	32 (1" 1/4)	42,4	2	47	340	10
200483316	40 (1" 1/2)	48,3	2	57	460	5
200603316	50 (2")	60,3	2	63	550	5
200761316	65 (2" 1/2)	76,1	2	76	990	5
200889316	80 (3")	88,9	2	85	1290	5
200114316	100 (4")	114,3	2	105	2060	4
200139316	125 (5")	139,7	2	124	1850	1
200168316	150 (6")	168,3	2	143	2980	1
200219316	200 (8")	219,1	2	178	4330	1

### Tolleranze dimensionali / Dimensional tolerances

D = il maggiore tra / the bigger between  $\pm 1 \% \times D / \pm 0,5 \text{ mm}$

F - F1 =  $\pm 2 \text{ mm}$

S =  $-12,5\% \times S / +20\% \times S$